

Q3

suprabeam[®]
| DENMARK

PACKAGING



380 LUMENS

SPECIFICATIONS

3xAAA

230 m

99 g

10° - 70°

WHAT'S IN THE BOX

TORCH



POUCH



STRAP



BATTERIES



MANUAL



UNIQUE SELLING POINTS (USP)

SLIDING HYPERFOCUS™

The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round flood light beam to a highly intensive, long range spot beam. All just by one-hand sliding of the head.


INTELLIGENT LIGHT CONTROL

The advanced electronic micro controller offers switching between high and low light power by simple switch operation. In addition, it controls the light output for optimized battery lifetime.

SWITCH

The endcap metal button is a switch with a task function, allowing you to step through the light modes without activating the lamp constantly. The different light functions are provided by our Intelligent Light Control circuit.

LIGHT CURVE AND RUNTIMES

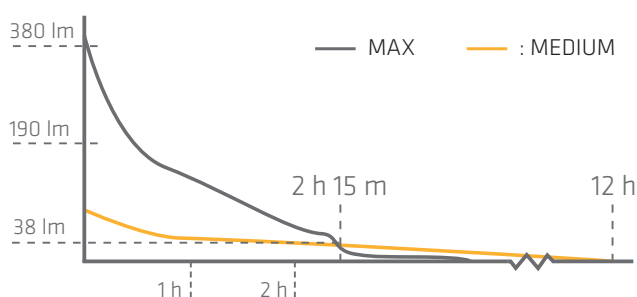

MAX

380 LUMENS
38

2 h | 15 min

HIGH

200 LUMENS
20

2 h | 45 min

MEDIUM

50 LUMENS
5

12 h

LOW

15 LUMENS
1.5

60 h

SPECIFICATIONS

| | |
|---|--|
| LED / Focus configuration: | 1 CREE Power Chip / Sliding Hyperfocus™ |
| Case Material / Surface Treatment: | Anodized, High Strength Aluminium |
| Case Color: | Anthracite Dark Grey |
| Switch: | Quality Tested Metal Switch With Touch Function - Switch At Rear |
| Dimensions: | L: 115.3mm, ø: 26.5mm |
| Weight incl. battery: | 99g |
| Ingress Protection Rating: | Splash Waterproof IPx4 |
| Temperature: | -20°C to +50°C |

ELECTRONICS

| | |
|--|--|
| Built in Controller: | Yes, 5-step controller by press or touch |
| Standard Power Source: | 3 x AAA Alkaline |
| Compatible with rechargeable cells: | Yes, with AAA NiMh 1.2V |
| Beam / Distance: | Variable from Spot to Floodlight / 230 Meters |
| Luminous Flux: | Max: 380 lm / High: 200 lm / Medium: 50 lm / Low: 15 lm / Stroboskop 10 Hz |
| Lighting Time: | Max: 2h 15min / High: 2h 45min / Medium: 12h / Low: 60h |
| Accessories included: | Pro. Quality Pouch with Velcro and Press Stud, Strap |

PACKAGING

| | |
|--|---|
| Customs Tariff Number: | 8513 1000 |
| Packaging: | Presentation tube |
| Single Box Content / Size / Weight: | 1 pcs, height/diameter, 18 x 8.5 cm / 232 g |
| Master Box Content / Size / Weight: | 32 pcs, 35.5 x 36 x 39 cm / 8.1 kg |
| Order's Address: | info@suprabeam.com |

FEATURES



INTELLIGENT LIGHT CONTROL (ILC)

Our intelligent light control lets you switch between different light outputs



COOLING CORE

The high strength aluminium cooperates with the "heatsink" to cool off the LED




TOUCH

Touch function enables you to toggle through the light levels swiftly, without having to fully activate the switch



WATER RESISTENT - IPX4

This IP-rating indicates that your product is water resistant



SLIDING FOCUS

Focus from wide floodlight to narrow spot light with the one handed sliding focus



COMPATIBLE WITH NiMH

With NiMH compatibility you will be able to make your alkaline torch or headlamp rechargeable